



Product Highlights

Full HD Resolution

A high-resolution 3-megapixel sensor provides 1080p resolution while digital wide dynamic range (WDR) technology lets you capture the details you need, ensuring that you always get sharp, clear snapshots and videos

Outdoor Installation

The IP66-rated weatherproof enclosure allows the camera to be mounted outdoors in temperatures ranging from -22 to 122 °F

Reliable 24-Hour Surveillance

Infrared LED illuminators provide sharp images at night up to 65 feet for dependable 24-hour surveillance



DCS-4703E

Vigilance Full HD Outdoor PoE Mini Bullet Camera

Features

Camera

- 1/3" 3 megapixel progressive CMOS sensor
- Fixed lens with focal length of 3.6 mm, and an F1.8 aperture
- Up to resolution of 1080p at 30 fps
- H.264, MJPEG codec support for streaming and recording
- Wide Dynamic Range image enhancement
- 3D filtering reduces image noise in low-light environments

Video

- Outdoor placement
- Built-in IR LED illuminator with a 65 foot range for use in dark areas
- Works in a wide range of climates from -22 °F to 122 °F
- Protective bracket for cables
- IP66 certified housing
- Glare reducing sun shield

Flexibility and Connectivity

- 10/100 Fast Ethernet port with PoE (Power over Ethernet) ensures easy integration into your network
- Supports 802.3x, QoS, CoS, and SNMP
- ONVIF compliant

The D-Link DCS-4703E Vigilance Full HD Outdoor PoE Mini Bullet Camera is a high-definition professional surveillance and security solution suitable for small, medium, and large enterprises. The camera uses a high-sensitivity 3 megapixel progressive scan CMOS sensor to deliver truly superior quality video under a wide range of lighting conditions. The all-in-one rugged design makes this camera ideal for reliable deployment in surveillance applications without the need for additional accessories. The DCS-4703E also includes a built-in 802.3af compliant PoE module that eases installation by providing power and networking connectivity with a single cable, reducing the need to drill holes or lay additional cabling.

Enhanced LowLight⁺ Video

The built-in IR LED illuminators automatically turn on depending on lighting conditions, allowing the camera to capture video even in low-light or no-light conditions. Incorporating a highly sensitive CMOS sensor, the DCS-4703E provides outstanding performance in low-light conditions, rendering more vibrant color details regardless of the amount of light available. The enhanced 3D noise reduction feature provides a level of detail in the image quality that is unmatched by other offerings in the market. With the IR-Cut filter, the DCS-4703E can provide sharp grayscale video in low-light conditions up to 65 feet.


Continuous Monitoring

Embedded with a powerful SoC (System-on-Chip), the DCS-4703E provides real-time video compression in H.264 and MJPEG formats. These elements combine to make this camera an ideal solution for 24-hour surveillance.

D-ViewCam for Management

The DCS-4703E Vigilance Full HD Outdoor PoE Mini Bullet Camera includes D-ViewCam, a complete surveillance software package that enables you to view, manage, and record from up to 32 cameras with a robust set of features, including multi-camera views and automated e-mail alerts to keep you informed of suspicious or unusual activities.

Vigilance Full HD Outdoor PoE Mini Bullet Camera

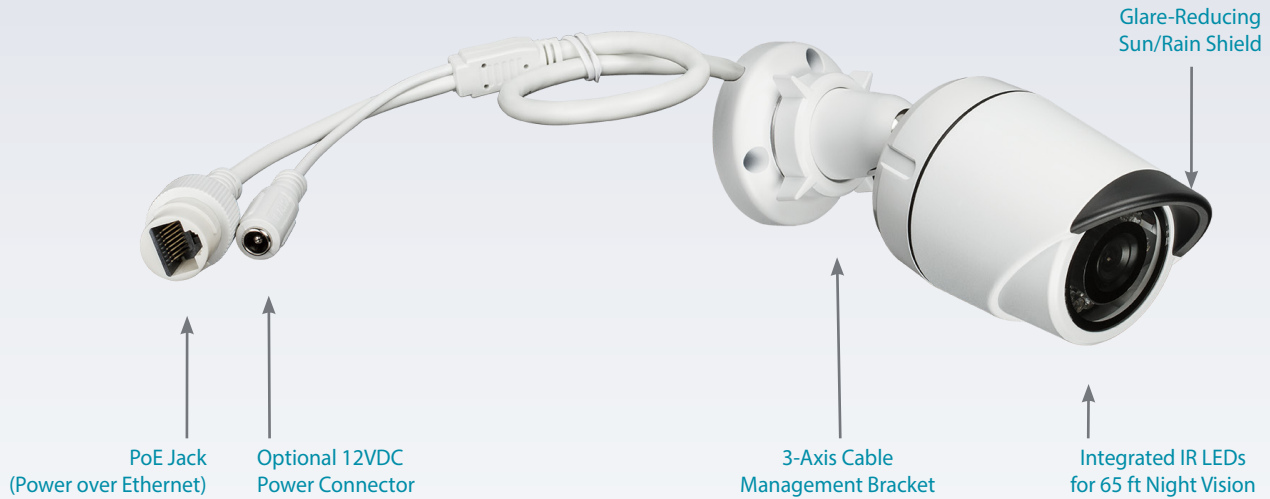

Technical Specifications


Camera

Hardware Profile	<ul style="list-style-type: none"> • 1/3" 3 megapixel progressive CMOS sensor • 65 feet IR illumination distance • Minimum illumination: <ul style="list-style-type: none"> • Day Mode: 0.2 lux • Night Mode (LEDs off): 0.1 lux • Night Mode (LEDs on): 0 lux • Built-in Infrared-Cut Removable (ICR) Filter module 	<ul style="list-style-type: none"> • 10x digital zoom • Minimum object distance 1.6 ft • Focal length: 3.6 mm • Aperture: F1.8 • Angle of view: <ul style="list-style-type: none"> • (H) 70° • (V) 40° • (D) 80°
Camera Housing	<ul style="list-style-type: none"> • IP-66 compliant weatherproof housing 	
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays • Configurable motion detection windows • Configurable privacy mask zones 	<ul style="list-style-type: none"> • Configurable shutter speed, brightness, saturation, contrast, and sharpness • WDR • 3D filter
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/MJPEG format compression • H.264/MJPEG multicast streaming 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolutions	<ul style="list-style-type: none"> • 16:9 • 1920 x 1080, 1280 x 720, 800 x 448, 640 x 360 up to 30 fps 	<ul style="list-style-type: none"> • 4:3 • 2048 x 1536 up to 15 fps • 1440 x 1080, 1280 x 960, 900 x 720, 800 x 592, 640 x 480 up to 30 fps
External Device Interface	<ul style="list-style-type: none"> • 10/100 BASE-T Fast Ethernet port 	<ul style="list-style-type: none"> • Supports 802.3af PoE

Network

Network Protocols	<ul style="list-style-type: none"> • IPv6 • IPv4 • TCP/IP • UDP • ICMP • DHCP client • NTP client (D-Link) • DNS client • DDNS client (D-Link) • SMTP client • FTP client 	<ul style="list-style-type: none"> • HTTP / HTTPS • Samba client • PPPoE • UPnP port forwarding • RTP / RTSP / RTCP • IP filtering • QoS • CoS • Multicast • SNMP • ONVIF compliant
Security	<ul style="list-style-type: none"> • Administrator and user group protection • Password authentication 	<ul style="list-style-type: none"> • HTTP and RTSP authentication

Vigilance Full HD Outdoor PoE Mini Bullet Camera

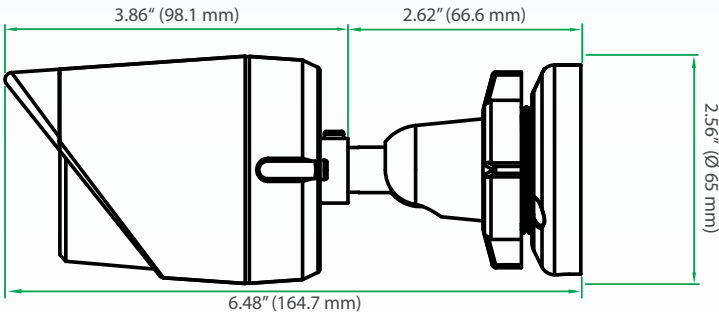System Management	
System Requirements for Web Interface	<ul style="list-style-type: none"> • Browser: Internet Explorer, Firefox, Chrome, or Safari
Event Management	<ul style="list-style-type: none"> • Motion detection • Event notification and uploading of snapshots/video clips via e-mail or FTP • Supports multiple SMTP and FTP servers • Multiple event notifications • Multiple recording methods for easy backup
Remote Management	<ul style="list-style-type: none"> • Take snapshots/video clips and save to local hard drive • Configuration interface accessible via web browser
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> • Supports all management functions provided in web interface • Scheduled motion triggered, or manual recording options • Remote management/control of up to 32 cameras • Viewing of up to 32 cameras on one screen
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> • Operating System: Microsoft Windows 10/8/7/Vista • Web Browser: Internet Explorer 7 or higher • Protocol: Standard TCP/IP
General	
External Power Adapter	<ul style="list-style-type: none"> • Input: 100 to 240 V AC, 50/60 Hz • Output: 12 V DC 1.5 A
Power Consumption	<ul style="list-style-type: none"> • 6.4 watts ± 5 % (PoE)
Temperature	<ul style="list-style-type: none"> • Operating: -22 to 122 °F (-30 to 50 °C) • Storage: -4 to 158 °F (-20 to 70 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 20 % to 80 % non-condensing • Storage: 5 % to 95 % non-condensing
Weight	<ul style="list-style-type: none"> • 0.95 lbs ± 5 %
Certifications	<ul style="list-style-type: none"> • CE • CE LVD • FCC • C-Tick
Dimensions	 <p>Technical drawing of the DCS-4703E camera showing dimensions:</p> <ul style="list-style-type: none"> 3.86" (98.1 mm) - Length of the main camera body 2.62" (66.6 mm) - Length of the mounting bracket 6.48" (164.7 mm) - Total length of the camera assembly 2.56" (Ø 65 mm) - Diameter of the mounting bracket
Package Contents	<ul style="list-style-type: none"> • Full HD Outdoor PoE Mini Bullet Camera (DCS-4703E) • Mounting Kit • Quick Installation Guide (QIG) • Manual & Software CD-ROM
Warranty	<ul style="list-style-type: none"> • 5-Year Limited Warranty⁴ • For warranty and regulatory information, please visit http://support.dlink.com/warranty
Order Information	
Part Number	Description
DCS-4703E	Vigilance Full HD Outdoor PoE Mini Bullet Camera

¹ Use of audio or video equipment for recording the image or audio of a person without their knowledge and consent is prohibited in certain states or jurisdictions. The end-user assumes all liability for compliance with applicable state, local and federal laws.

² Frame rates when streaming video may vary depending on network conditions and method used.

³ Computer must adhere to Microsoft's recommended system requirements.

⁴ 5-Year warranty available in U.S.A. only.

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

©2016 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, mydlink, ShareCenter and the D-link RoHS logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. iPhone and iPad are registered trademarks of Apple Inc. Android is a trademark of Google Inc. Windows is a registered trademark of Microsoft Inc.